



NEOFIX

NEOFIX® 80

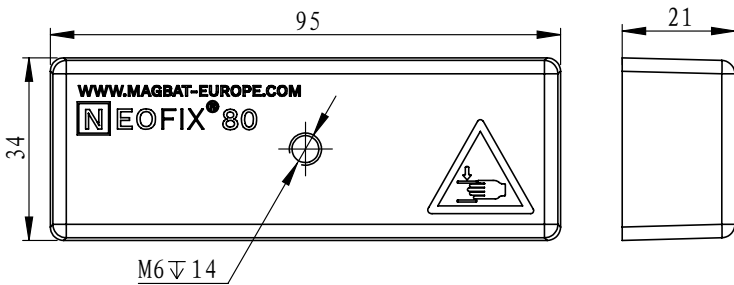

Model:	NEOFIX®80
Pull force:	80 DaN
Shear force:	30 DaN
Material:	NdFeb
Coating:	EPDM
Colour:	RAL 5003 (Blue)
Dimensions:	95*34*21 mm
Weight:	0.35 kg
Thread:	1x M6*14
Thread material:	RVS 316 L

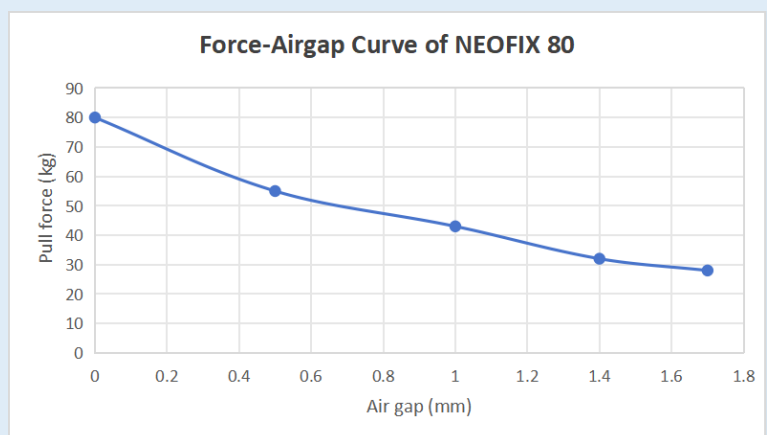

NEOFIX

APPLICATIONS



ASSEMBLY AND DISMANTLING

ASSEMBLY

- Remove the magnet protection
- Remove impurities and loose parts from the mounting wall / ceiling / floor before attaching the magnets.
- Preferable use the NF-TOOL to attach the magnet.
- NOTE: Never place fingers or other limbs between the magnet and the magnetic surface.

DISMANTLING

- Screw the NF-TOOL into the magnet
- Tilt the magnet away from the magnetic material



SAFETY INSTRUCTIONS

- Always read the assembly and dismantling instructions before using the magnets.
- NEOFIX® magnets are very strong. Never place fingers or other limbs between the magnet and magnetic surface. This can result in serious injury!



STORAGE

- Always place a layer of non-magnetic material between 2 magnets when you store them.